

AD 741 793

ARL 72-0028  
FEBRUARY 1972



## **Aerospace Research Laboratories**

### **INCOMPLETE MULTIVARIATE DESIGNS, OPTIMAL WITH RESPECT TO FISHER'S INFORMATION MATRIX**

*J. N. SRIVASTAVA*

*M. K. ZAATAR*

*COLORADO STATE UNIVERSITY  
FORT COLLINS, COLORADO*

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
Springfield, Va. 22151


CONTRACT NO. F33615-67-C-1436

PROJECT NO. 7071


Approved for public release; distribution unlimited.

AIR FORCE SYSTEMS COMMAND

**United States Air Force**

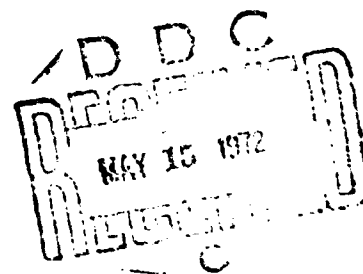

# DISCLAIMER NOTICE

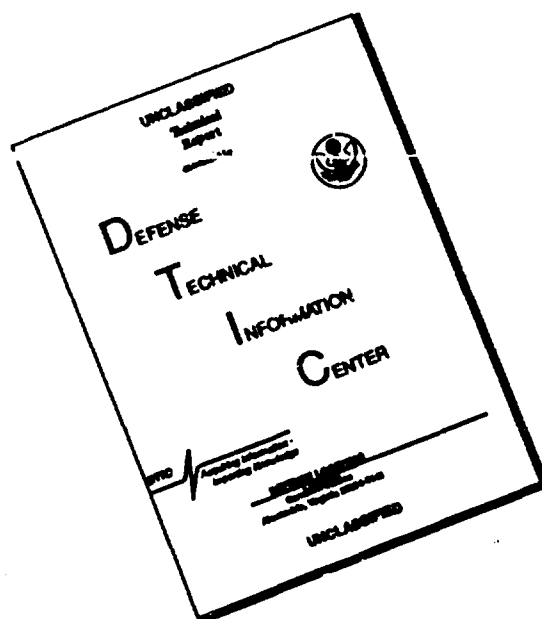

**THIS DOCUMENT IS BEST  
QUALITY AVAILABLE. THE COPY  
FURNISHED TO DTIC CONTAINED  
A SIGNIFICANT NUMBER OF  
PAGES WHICH DO NOT  
REPRODUCE LEGIBLY.**

## NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Agencies of the Department of Defense, qualified contractors and other government agencies may obtain copies from the

Defense Documentation Center  
Cameron Station  
Alexandria, Virginia 22314

This document has been released to the

CLEARINGHOUSE  
U. S. Department of Commerce  
Springfield, Virginia 22151

for the sale to the public.

ACCESSION NO.	
DPSTI	WHITE SECTION <input checked="" type="checkbox"/>
DDC	DIFF SECTION <input type="checkbox"/>
ORANNOGCTD	<input type="checkbox"/>
JUSTIFICATION	
Copies of ARL Technical Documentary Reports should not be returned to Aerospace Research Laboratories unless return is required by security considerations, contractual obligations or notices on a specified document.	
BY	
DISTRIBUTION/AVAILABILITY CODES	
SIST.	AIR FORCE SPECIAL 00
A	

Unclassified

Security Classification

## DOCUMENT CONTROL DATA - R &amp; D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Department of Statistics Colorado State University Fort Collins, Colorado 80521		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP M-2	
3. REPORT TITLE Incomplete Multivariate Designs, Optimal with Respect to Fisher's Information Matrix			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific Interim			
5. AUTHOR(S) (First name, middle initial, last name) J. N. Srivastava and M. K. Zaatar			
6. REPORT DATE February 1972		7a. TOTAL NO. OF PAGES 26	7b. NO. OF REFS 8
8a. CONTRACT OR GRANT NO. F 33615-67-C-1436		9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 7071-00-12			
c. DoD Element 61102F		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d. DoD Subelement 681304		ARL 72-0028	
10. DISTRIBUTION STATEMENT Approved for public release, distribution unlimited			
11. SUPPLEMENTARY NOTES TECH OTHER		12. SPONSORING MILITARY ACTIVITY Aerospace Research Laboratory (LB) Wright-Patterson AFB, Ohio 45433	
13. ABSTRACT Consider a $n$ -variate normal population $N_n(\mu, \Sigma)$ , with $\mu$ known and $\Sigma$ unknown. Without loss of generality, we take $\mu = 0$ . Suppose that we have an incomplete multiresponse sample, i.e., we have samples available from this population and/or its various marginals. Suppose one is interested in estimating $\Sigma$ , given that all the correlations are known.  Consider the Fisher information matrix $H$ , corresponding to the estimation of the variances $\sigma_{tt}$ . Consider the marginal involving the responses $i_1, i_2, \dots, i_k$ , and suppose that from this marginal a sample of $n(i_1, i_2, \dots, i_k)$ is drawn. It is then seen that $H$ is a linear function of the $n$ 's. Suppose that the cost of taking an observation on the $j$ th response is $\psi_j$ , and that a total amount of money $\psi$ is available for the collection of samples. The problem considered in this paper is the following. How to choose the $n$ 's subject to the cost restriction, such that the determinant of $H$ is maximized. A complete solution is obtained for the case $n = 2$ . When $n = 3$ , some partial results are obtained. In particular, it is shown that when all the costs are equal, and the correlations are equal, then the best design is obtained by using a complete sample.			

DD FORM 1473  
1 NOV 65

Unclassified

Security Classification

Unclassified  
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Incomplete Designs Optimality Multivariate Analysis						

Unclassified

Security Classification

ARL 72-0028

**INCOMPLETE MULTIVARIATE DESIGNS,  
OPTIMAL WITH RESPECT TO FISHER'S  
INFORMATION MATRIX**

*J. N. SRIVASTAVA AND M. K. ZAATAR  
COLORADO STATE UNIVERSITY  
FORT COLLINS, COLORADO*

FEBRUARY 1972

CONTRACT NO. F33615-67-C-1436  
PROJECT NO. 7071

Approved for public release; distribution unlimited.

AEROSPACE RESEARCH LABORATORIES  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE  
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

## FOREWORD

The work on this paper was wholly supported by Contract F 33615-67-C-1436 of the Aerospace Research Laboratories, Air Force Systems Command United States Air Force. The work reported herein was accomplished on Project 7071, "Research in Applied Mathematics", and was technically monitored by Dr. P. R. Krishnaiah of the Aerospace Research Labs, whose interest in the present work is greatly appreciated.

# ABSTRACT

Consider a  $p$ -variate normal population  $N_p(\underline{\mu}, \Sigma)$ , with  $\underline{\mu}$  known and  $\Sigma$  unknown. Without loss of generality, we take  $\underline{\mu} = \underline{0}$ . Suppose that we have an incomplete multiresponse sample, i.e., we have samples available from this population and/or its various marginals. Suppose one is interested in estimating  $\Sigma$ , given that all the correlations are known.

Consider the Fisher information matrix  $H$ , corresponding to the estimation of the variances  $\sigma_{tt}$ . Consider the marginal involving the responses  $i_1, i_2, \dots, i_k$ , and suppose that from this marginal a sample of  $n(i_1, i_2, \dots, i_k)$  is drawn. It is then seen that  $H$  is a linear function of the  $n$ 's. Suppose that the cost of taking an observation on the  $j$ th response is  $\psi_j$ , and that a total amount of money  $\psi'$  is available for the collection of samples. The problem considered in this paper is the following. How to choose the  $n$ 's subject to the cost restriction, such that the determinant of  $H$  is maximized. A complete solution is obtained for the case  $p = 2$ . When  $p = 3$ , some partial results are obtained. In particular, it is shown that when all the costs are equal, and the correlations are equal, then the best design is obtained by using a complete sample.



## 1. Introduction

In most experiments or investigations, usually more than one response or characteristic is measured on an experimental unit or individual. The interest very often lies in estimating certain parameters (usually of the location or scale type) on each response. It is well known that, in general, as the number of units on which a response is observed is increased, the efficiency of the estimate also increases. However, in general, one is faced with financial limitations. In other words, there is a certain cost  $\psi_j$  of measuring the  $j^{\text{th}}$  response on a single unit, and there is a cost  $\psi_0$  of having a unit available for the experiment. Furthermore, a certain total amount of money (say, 1) is allotted for the experiment. In this situation, not only the number of observations that can be taken on any response is bounded, the number of observations on other responses decreases as the number of observations on a particular response is increased. This indicates that an overall measure of the efficiency of the whole multiresponse experiment is desirable. Also, the number of observations to be taken on the different responses should be determined so as to maximize the overall efficiency of the whole experiment. This is an important aspect of the subject of multiresponse designs.

Certain problems in this field have been studied before. For example, suppose the interest lies in the estimation of the differences between the true effects of a set of  $v$  treatments on each of a set of  $p$  responses. Thus there will be  $v - 1$  linearly independent comparisons for each

response, giving rise to  $p(v-1)$  estimators. Let  $K$  denote the  $p(v-1) \times p(v-1)$  variance matrix of these estimators. In Srivastava and McDonald (1969), the problem of obtaining the optimal multiresponse design (with respect to the minimization of  $\text{tr. } K$ ) is considered. This paper is concerned with the case of randomized block designs. A similar paper involving cyclic PBIB designs was considered in Srivastava and McDonald (1970). The first problem under the determinant criterion was considered in Srivastava and McDonald (1971).

A multiresponse design problem, posed in a somewhat different fashion has been considered by Hocking and Smith (1971).

In this paper, we consider a multiresponse design problem when such parameters are to be estimated. The optimization under the given cost restriction, is done with respect to maximizing the determinant of the fixed information matrix corresponding to these parameters.

## 2. Preliminaries.

Consider the problem of designing an experiment for estimating the unknown dispersion matrix  $\Sigma = ((\sigma_{ts}))$ , ( $t, s = 1, 2, \dots, p$ ) of a  $p$ -variate normal distribution whose mean vector is assumed to be known and equal to zero. (This choice of the known value of the mean causes no loss of generality). The collection of data, for this purpose, could be in the form of a general incomplete multiresponse sample. This sample is divided into subsamples,  $S_j$  ( $j = 1, 2, \dots, u = 2^p - 1$ ) such that on every experimental unit in  $S_j$ , exactly the subset  $R_j$  (where  $R_j = \{\ell_{j1}, \ell_{j2}, \dots, \ell_{jp_j}\}$ ) of responses is measured. Thus  $u$  is the number of all non-empty subsets of  $\{1, 2, \dots, p\}$ , and  $n_j$  is the number of units in  $S_j$ . The subsets  $R_j$  are assumed to be ordered in any arbitrary but fixed manner.

We also assume that the elements of  $R_j$  are such that  $1 \leq \ell_{j1} < \ell_{j2} < \dots < \ell_{jp_j} \leq p$ .

The principal submatrix of  $\Sigma$  corresponding to  $R_j$  is denoted by  $\Sigma_j$ .

For any response  $r$ , we define  $U_r$  as the union of sets  $S_j$  the union being taken over all  $j$  such that  $r \in R_j$ . Thus,  $U_r$  is the set of all units on which response  $r$  (possibly along with other responses) is measured. We shall also assume a cost restriction of the form mentioned in the introduction, and without loss of generality, label the responses such that  $\psi_1 \leq \psi_2 \leq \dots \leq \psi_p$ .

Our objective is to obtain an optimal set of values of the  $n_j$  under these cost limitations. By "optimal" we mean the sample should be such as to maximize the "amount of information" obtained from the data within our financial limitations.

In this paper, we choose our measure of information to be the determinant of Fisher's information matrix  $H$ . For convenience of reference, we may state here the definition of  $H$ . Suppose in any given situation, one is interested in estimating a set of parameters  $\theta_1, \dots, \theta_m$ , and suppose  $L$  denotes the likelihood of the sample. Then  $H = ((h_{ij}))$  is  $(m \times m)$ , and  $h_{ij} = E \{-\partial^2 \log L / \partial \theta_i \partial \theta_j\}$ , where  $E$  denotes "expectation". Note that the dispersion matrix  $V$  of the estimators is asymptotically proportional to the inverse of Fisher's information matrix when these estimators are maximum likelihood estimators, or belong to the class of asymptotically efficient estimators. Also, a plausible property of the determinant criterion is the fact that the  $\det. H$  and  $\det. V$  are, respectively, directly and inversely proportional to the volume of the ellipsoid of concentration. See, for example, Roy, Gnanadesikan and Srivastava (1971).

A design D, in this study, is a determination of the vector  $\underline{n} = (n_1, n_2, \dots, n_u)$ , specifying, for each subset of responses, the experimental units on which this subset of responses is to be measured. The  $n_j$ 's must satisfy the cost restriction,

$$(2.1) \quad 1 = \sum_{j=1}^u (\zeta_j) n_j,$$

where  $\zeta_j = \psi_0 + \psi_{\ell j1} + \psi_{\ell j2} + \dots + \psi_{\ell jp_j}$ . Under each design D, the

criterion of optimization is represented by  $[\det. H(D)] = Q(D)$ , say, where  $H(D)$  is the matrix H corresponding to the design D. Thus we are faced with an optimization problem in which Q is the objective function and (2.1) is the constraint. It should be pointed out that the  $n_j$ 's should also be positive and take on integer values only. However, for practical considerations, the latter requirement shall be overlooked. The cost associated with a design D shall be denoted by  $\psi(D)$ .

Definition 2.1 A design D is said to be at least as good as a design D', if  $Q(D) \geq Q(D')$  and  $\psi(D) \leq \psi(D')$ . Moreover, if any of the two inequalities becomes strict, then D is said to be better and D' is said to be inadmissible.

Definition 2.2 A (sub) class C of designs is said to be essentially complete in the class C', if  $C \subseteq C'$  and for any  $D' \in C'$ , there exists a  $D \in C$ , such that D is as good as D'.

### 3. The case $\Sigma = \theta A$ , A known.

Here, we shall assume that the positive number  $\theta$  is the only unknown, and A is a positive definite matrix. An easy computation then gives

$$(3.1) \quad H = E \left( - \frac{\partial^2 \log L}{\partial \theta^2} \right) = \frac{\sum_{j=1}^u n_j p_j}{2\theta^2}.$$

Thus we must find  $n$ 's so as to maximize  $\sum_{j=1}^u n_j p_j$  subject to (2.1).

This is equivalent to maximizing  $\sum^* n_j^!$ , subject to  $\sum^* (\zeta_j / p_j) n_j^! = 1$ , where  $\sum^*$  denotes summation over  $j \in J$ , where  $J = \{j | p_j \neq 0\}$ . Let  $j^*$  be a value of  $j$  such that  $(\zeta_j / p_j)$  attains a minimum (over restriction of  $j$  in  $J$ ) when  $j = j^*$ . Then clearly, a solution of the problem is: Take  $n_j = 0$ , if  $j \neq j^*$ , and take  $n_{j^*} = (1/\zeta_{j^*})$ . This clearly leads to

Theorem 3.1 Let  $\zeta_r^* = (\psi_0 + \psi_1 + \dots + \psi_r)$ ;  $r = 1, \dots, p$ . Let  $n_r^*$  be the size of the sample from the marginal distribution of responses  $1, 2, \dots, r$ . Let  $r^*$  be such that  $(r^* / \zeta_{r^*}^*) = \max_{1 \leq r \leq p} \{r / \zeta_r^*\}$ . Then the optimal design is obtained by taking a sample of size  $(1/\zeta_{r^*}^*)$  from the marginal of responses  $1, 2, \dots, r^*$ . Clearly, the optimal design is an HM design. Also, it is easily checked that this HM design reduces to an SM design if and only if  $\psi_p \leq \zeta_{p-1}^* / (p-1)$ .

#### 4. The case of uncorrelated responses.

In the case of uncorrelated responses, the Fisher's information matrix  $H$  reduces to a diagonal matrix with  $h_{tt} = (2N_t) / \zeta_t^2$ , ( $t = 1, 2, \dots, p$ ), where  $N_t = \sum_{j \in U_t} n_j$ . Our problem is to maximize the objective function  $Q = \prod_{t=1}^b N_t$ , subject to the cost restriction (2.1), which is now equivalent to  $\psi_0 N_0 + \sum_{t=1}^b \psi_t N_t = 1$ . The following result can then be proved in a way parallel to theorem 4.2 in Srivastava and McDonald (1971).

Theorem 4.1. Let  $m_1, \dots, m_p$  denote respectively the values of  $N_1, \dots, N_p$  which maximizes  $Q$  subject to the above cost restriction.

(a) Let  $k$  be the first integer such that

$$(4.1) \quad (k-2)\psi_{k-1} \leq \zeta_k^* - 2, \quad (k-1)\psi_k > \zeta_k^* - 1,$$

where  $\zeta_j^* = \psi_0 + \psi_1 + \dots + \psi_j$ , and  $k$  can take the values  $2, 3, \dots, p$ . Then the optimal design is an HM design with

$$(4.2) \quad m_1 = \dots = m_{k-1} = (k-1)/(p\zeta_{k-1}^*), \text{ and } m_j = 1/p\psi_j, \quad (j=k, \dots, p).$$

(b) If (4.1) does not hold for any value of  $k(2 \leq k \leq p)$ , then

we have the SM model with  $m_1 = m_2 = \dots = m_p$ .

#### 5. The case $p = 2$ , and known correlation.

For the case of a bivariate population, let  $n_1$  and  $n_2$  be the sizes of the univariate samples from the marginals of the first and second responses, respectively. The size of the bivariate sample will be denoted by  $n_3$ . Also,  $\rho$  will denote the correlation coefficient  $\rho_{12}$ . The Fisher's information matrix  $H$  is given by

$$(5.1) \quad H = \begin{bmatrix} \frac{1}{\sigma_1^2} (2n_1 + \frac{2-\rho^2}{1-\rho^2} n_3) & -\frac{1}{\sigma_1\sigma_2} (n_3 \frac{\rho^2}{1-\rho^2}) \\ -\frac{1}{\sigma_1\sigma_2} (n_3 \frac{\rho^2}{1-\rho^2}) & \frac{1}{\sigma_2^2} (2n_2 + \frac{2-\rho^2}{1-\rho^2} n_3) \end{bmatrix}$$

We proceed now to find the optimum design under the determinant criterion. We want to choose  $n_1, n_2$  and  $n_3$  so as to maximize  $|H|$  or, equivalently,

$$(5.2) \quad Q = n_1 n_2 + a(n_1 + n_2)n_3 + b n_3^2, \quad \text{subject to}$$

$$(5.3) \quad d = n_1 d_1 + n_2 d_2 + n_3, \quad \text{where}$$

$$(5.4) \quad a = (2 - \rho^2)/2(1 - \rho^2), \quad b = 1/(1 - \rho^2), \quad d = 1/(\psi_0 + \psi_1 + \psi_2),$$

$$d_1 = (\psi_0 + \psi_1)/(\psi_0 + \psi_1 + \psi_2), \quad d_2 = (\psi_0 + \psi_2)/(\psi_0 + \psi_1 + \psi_2).$$

The inequalities  $d_1 \leq d_2$ ,  $0 \leq d_1 \leq 1$ ,  $0 \leq d_2 \leq 1$ ,  $d_1 + d_2 \geq 1$ ,  $a = \frac{b+1}{2}$ , and  $b > a > 1$ , can be easily checked.

**Theorem 5.1.** The sub class  $C^*$  of HM designs is essentially complete in the class  $C$  of GIM designs.

Proof: The assumption  $\psi_1 \leq \psi_2$  implies that a design  $D(n_1, n_2, n_3)$  in which  $n_1 \geq n_2$  is at least as good as the design  $D'(n_2, n_1, n_3)$ . Consequently, designs like  $D'$  shall be ignored. Thus let  $D \in C$ . Construct  $D^*(m_1, m_2, m_3)$  as follows. Take  $m_1 = n_1 - n_2$ ,  $m_2 = 0$ , and  $m_3 = n_2 + n_3$ . The design  $D^*$  is of the HM type and an equivalent way of constructing it is to measure the first response on  $n_1 + n_3$  experimental units, then measure the second response on a subset of these units of size  $n_2 + n_3$ . We have

$$Q(D^*) = m_1 m_2 + a(m_1 + m_2)m_3 + b m_3^2 = a(n_1 - n_2)(n_2 + n_3) + b(n_2 + n_3)^2.$$

It follows that  $Q(D^*) - Q(D) = (a - 1)n_1 n_2 + (b - a)n_2^2 + 2(b - a)n_2 n_3 \geq 0$ .

We also find that  $\psi(D) - \psi(D^*) = \psi_0 n_2 > 0$ . This completes the proof.

Thus, we will restrict attention to HM designs only, by taking  $n_2 = 0$ , and  $n_1, n_3 \geq 0$ . Our problem is reduced to that of maximizing  $Q = a n_1 n_3 + b n_3^2$ , subject to  $d = d_1 n_1 + n_3$ ,  $n_1, n_3 \geq 0$ . It is obvious here that the choice  $n_3 = 0$ , is never optimal. Now,  $n_3 = d - n_1 d_1$ , and hence  $Q = (d_1 n_1 - d)[(b d_1 - a)n_1 - b d]$ . By considering the roots of this quadratic in  $n_1$ , one can easily prove

**Theorem 5.2:** A necessary and sufficient condition for the SM model to be optimal is that  $(\psi_2 / \psi_0 + \psi_1) \leq (2 + \rho^2)/(2 - \rho^2)$ . Otherwise the HM design with  $n_1 = d(2b d_1 - a)/2d_1(b d_1 - a)$  and  $n_3 = d a / 2(a - b d_1)$ , is the optimal one.

6. The case  $p = 3$ .

Consider a general incomplete sample from a 3-variate normal population. Let us assume that the variances are unknown, while the  $(3 \times 3)$  correlation matrix  $((\rho_{rs}))$  ( $r, s = 1, 2, 3$ ) is known and the mean is equal to the zero vector. For simplicity we shall use the notation:  $\rho_{jk} = \rho_i$ , where  $(i, j, k) \in F$ , and  $F$  is the set of (the six) permutations of  $(1, 2, 3)$ . Thus this notation means  $\rho_{23} = \rho_{32} = \rho_1$ ,  $\rho_{12} = \rho_{21} = \rho_3$ ,  $\rho_{13} = \rho_{31} = \rho_2$ . We find, after some calculations, that the elements  $h_{ij}$  of Fisher's information matrix, in this case, are (for  $(i, j, k) \in F$ ) given by

$$(6.1) \quad h_{ii} = \sigma_i^{-2} [2n_i + a_i n_{ij} + a_k n_{ik} + b_i n_{123}], \quad h_{ij} = (\sigma_i \sigma_j)^{-1} (c_k n_{123} + d_k n_{ij}), \text{ where}$$

$$a_i = \frac{2-\rho_i^2}{1-\rho_i^2}, \quad b_i = 1 + \frac{1-\rho_i^2}{\Delta}, \quad c_i = \frac{\rho_1 \rho_2 \rho_3 - \rho_i^2}{\Delta}, \quad d_i = \frac{-\rho_i^2}{1-\rho_i^2},$$

$$\Delta = |((\rho_{ij}))| = 1 - \sum_{i=1}^3 \rho_i^2 + 2\rho_1 \rho_2 \rho_3,$$

and where  $n_i$  ( $i=1, 2, 3$ ),  $n_{ji}$  ( $i \neq j$ ;  $i, j = 1, 2, 3$ ) and  $n_{123}$  are, respectively, the sample sizes from the corresponding univariate marginals, bivariate marginals and the parent distribution. Define, for  $(i, j, k) \in F$ ,

$$(6.2) \quad m_i = \sigma_i^2 h_{ii}, \quad \mu_k = \sigma_i \sigma_j h_{ij}, \quad g_i = \psi_0 + \psi_i, \quad f = \sum_{r=0}^3 \psi_r, \quad f_i = f - \psi_i.$$

Assume that the total money available for taking samples is 1. Our objective is to find a determination of  $\underline{n}' = (n_1, n_2, n_3, n_{12}, n_{13}, n_{23}, n_{123})$  which maximizes  $|H|$  or, equivalently, the quantity  $Q$ , where

$$(6.3) \quad Q = \sigma_1^2 \sigma_2^2 \sigma_3^2 |H| = m_1 m_2 m_3 + 2\mu_1 \mu_2 \mu_3 - m_1 \mu_1^2 - m_2 \mu_2^2 - m_3 \mu_3^2,$$



subject to the cost restriction

$$(6.4) \quad 1 = g_1 n_1 + g_2 n_2 + g_3 n_3 + f_1 n_{23} + f_2 n_{13} + f_3 n_{12} + f n_{123}.$$

A direct attack on this problem, by way of expanding  $Q$  as a cubic in the 7 elements of  $\underline{n}$ , seems to be unwieldy. The subsequent sections will offer alternative methods of approach.

#### 7. The perturbation method.

We start by assuming that the design  $D(\underline{n})$  is optimal, i.e. for any other design  $D^+(\underline{n}^+)$  we have  $Q(D^+) \leq Q(D)$ , and  $\psi(D) = \psi(D^+) = 1$ . This means that  $Q$  has a global maximum at the point  $\underline{n}$  determined by  $D$ . Let us displace the point  $\underline{n}$  to the point  $\underline{n} + \underline{\delta}$ . Suppose this results in a displacement of  $(m_1, m_2, m_3, \mu_1, \mu_2, \mu_3)$  by the increments  $(\epsilon_1, \epsilon_2, \epsilon_3, \theta_1, \theta_2, \theta_3)$ , respectively. The value of  $Q$  undergoes the change:

$$(7.1) \quad Q(\underline{n} + \underline{\delta}) - Q(\underline{n}) = \Sigma^* [1/2 \epsilon_i (m_j m_k - \mu_i^2) + \theta_i (\mu_j \mu_k - m_i \mu_i)] + P_0 = \\ = P_1 + P_0, \text{ say}$$

where  $\Sigma^*$  shall always denote summation over all triplets  $(i, j, k) \in F$ , and where  $P_0$  is a polynomial of  $\epsilon$ 's and  $\theta$ 's of the third degree and

$$(7.2) \quad \epsilon_i = 2\delta_i + a_k \delta_{ij} + a_j \delta_{ik} + b_i \delta_{123}, \quad \theta_i = d_i \delta_{jk} + c_i \delta_{123}.$$

The sign of  $Q(\underline{n} + \underline{\delta}) - Q(\underline{n})$  is the same as that of  $P_1$ , provided that  $\underline{\delta}$  and consequently the  $\epsilon$ 's and the  $\theta$ 's are such that  $P_0$  is negligible compared to  $P_1$ . By the use of (7.2), the polynomial  $P_1$  can be expressed directly in terms of  $\underline{\delta}$  as:

$$(7.3) \quad P_1 = (1/2) \sum [(\phi_i) \delta_i + \delta_{ij} (a_k \phi_i + a_k \phi_j) 2\tau_k d_k] + \delta_{123} \sum_{i=1}^3 (b_i \phi_i + 2\tau_i c_i),$$

where  $\phi_i = m_j m_k - \mu_i^2$ ,  $\tau_i = \mu_k \mu_j - m_i \mu_i$ . Because of the cost condition (6.4), the components of  $\underline{\delta}$  satisfy

$$(7.4) \quad g_1 \delta_1 + g_2 \delta_2 + g_3 \delta_3 + f_3 \delta_{12} + f_2 \delta_{13} + f_1 \delta_{23} + f \delta_{123} = 0.$$

It is interesting to note that the  $\phi$ 's and the  $\tau$ 's are the six different cofactors of the  $(3 \times 3)$  matrix  $((g_{ij}))$ , where  $g_{ij} = \sigma_i \sigma_j h_{ij}$ .

Theorem 7.1: A design  $D(n)$  is not optimal if there exists a  $\underline{\delta}$  such that  $D(n + \underline{\delta})$  is a design,  $P_1$  is positive and  $|P_0| \leq |P_1|$ .

Proof: The proof is evident from the preceding development.

This result will be applied to some important special cases.

The SM model. For the SM model we have all the  $n$ 's equal to zero, except

$n_{123} = 1/r = m$ , say. Consequently, for  $(i, j, k) \in F$ , we also have

$\phi_i = m^2 (b_j b_k - c_i^2)$ ,  $\tau_i = (c_j c_k - b_i c_i) m^2$ . Thus

$$(7.5) \quad P_1 = m^2 \sum [\alpha_i \delta_i + (1/2)(a_k \alpha_i + a_k \alpha_j + d_k \beta_k) \delta_{ij} + (1/2)(b_i \alpha_i + c_i \beta_i) \delta_{123}], \text{ where}$$

$$\alpha_i = b_j b_k - c_i^2, \quad \beta_i = 2(c_j c_k - b_i c_i).$$

Let  $\alpha^*$  denote the coefficient of  $\delta_{123}$  in (7.5), i.e.,

$$(7.6) \quad \alpha^* = b_1 \alpha_1 + b_2 \alpha_2 + b_3 \alpha_3 + c_1 \beta_1 + c_2 \beta_2 + c_3 \beta_3.$$

Substituting in (7.5), the value of  $\delta_{123}$  using the cost condition (7.4), we get

$$(7.7) \quad P_1 = (m^2/2)\Sigma^* [(2d_i - \alpha^*g_i/f)\delta_i + (a_k\alpha_i + a_k\alpha_j + d_k\beta_k - \alpha^*f_k/f)\delta_{ij}]$$

Invoking Theorem (6.1) and observing that the  $\delta$ 's in (7.7) must be nonnegative numbers ( $\underline{n} + \underline{\delta}$  is a design) which can be taken sufficiently small so that  $|P_0| < |P_1|$ , we obtain

Corollary 7.1: A necessary condition for the Sh model to be optimal is that,

$$\alpha^* > (f) \max_{(i,j,k) \in F} (2\alpha_i/g_i, (a_i\alpha_j + a_i\alpha_k + d_i\beta_i)/f_i).$$

#### The GIM Model.

Consider the GIM design D with  $\underline{n} > \underline{0}$ , and let  $\eta$  denote the coefficient of  $\delta_{123}$  in (7.3), i.e.

$$(7.8) \quad \eta = b_1\phi_1 + b_2\phi_2 + b_3\phi_3 + 2\tau_1c_1 + 2\tau_2c_2 + 2\tau_3c_3.$$

Substituting for  $\delta_{123}$  from (7.4) in (7.3), we get

$$(7.9) \quad P_1 = \Sigma^* [(2\phi_i - \eta g_i/f)\delta_i + (a_k\phi_i + a_k\phi_j + 2\tau_kd_k - \eta f_k/f)\delta_{ij}](1/2)$$

According to theorem (7.1), a necessary condition for a design D to be optimal, is that  $P_1$  be negative. Moreover, since the  $\delta$ 's can be both negative and positive (the  $n$ 's  $> 0$ ), their coefficients must vanish. For example, suppose that the coefficient of  $\delta_3$ , say, is not zero, then we can

select all other  $\delta$ 's to be zero, and choose  $\delta_3$  to have the same sign as that of its coefficient, thus giving rise to a positive value for  $P_1$ , which implies that  $Q$  of (6.3) does not have a maximum at the point  $\underline{n}$  determined by  $D$ . We have established

Corollary 7.2. A necessary condition for the (GTM) design  $D(n_1 > 0, n_2 > 0, \dots, n_{123} > 0)$  to be optimal is that all the following hold simultaneously

$$(7.10) \quad (a) \, n g_i = 2 f \phi_i, (b) \, n f_i = (a_i \phi_j + a_i \phi_k + 2 r_{11} d_1) f.$$

The conditions (7.10), in addition to the cost restriction (6.4) form a set of seven equations in seven unknowns. Thus we could (theoretically) solve for the values of the  $n$ 's. If a design specifies that some subset of the  $n$ 's of size  $x$ , say, must be zero, then in (7.10) we would have  $(6 - x)$  equations and  $x$  inequalities. Again here, with the cost restriction, we would have to solve  $(7 - x)$  equations for  $(7 - x)$  unknowns. For any design  $D$ , this procedure determines the optimal values of the positive  $n$ 's in terms of the costs  $\psi_i$  and the correlation coefficients  $\rho_i$ . Any two designs, then, can be compared according to the values of  $Q$  arising from adopting each of them.

#### The HM model.

A choice of the vector  $\underline{n}$  such that, say,  $n_1 > 0$ ,  $n_{12} > 0$ , and  $n_{123} > 0$ , while the rest of  $n$ 's are equal to zero, gives rise to an HM design. From (6.2) we have  $m_1 = 2n_1 + a_3 n_{12} + b_1 n_{123}$ ,  $m_2 = 2n_2 + a_3 n_{12} + b_2 n_{123}$ ,  $m_3 = b_3 n_{123}$ ,  $\mu_1 = c_1 n_{123}$ ,  $\mu_2 = c_2 n_{123}$ ,  $\mu_3 = d_3 n_{12} + c_3 n_{123}$ .

From (7.4) we also get the corresponding values of  $\phi_i$  and  $\tau_i$  as

$$\phi_1^* = a_3 b_3 n_{12} n_{123} + (b_2 b_3 - c_1^2) n_{123}^2,$$

$$\phi_2^* = b_3 (2n_1 + a_3 n_{12}) n_{123} + (b_1 b_3 - c_2^2) n_{123}^2,$$

$$\phi_3^* = 2a_3 n_1 n_{12} + (a_3^2 - d_3^2) n_{12}^2 + [a_3 (b_1 + b_2) - 2c_3 d_3] n_{12} n_{123} + 2b_2 n_1 n_{123} + (b_2 b_1 - c_3^2) n_{123}^2,$$

$$\tau_1^* = [(c_2 d_3 - a_3 c_1) n_{12} - 2c_1 n_1] n_{123} + (c_2 c_3 - c_1 b_1) n_{123}^2,$$

$$\tau_2^* = (c_1 d_3 - a_3 c_2) n_{12} n_{123} + (c_1 c_3 - c_2 b_2) n_{123}^2,$$

$$\tau_3^* = (c_1 c_2 - c_3 b_3) n_{123}^2 - b_3 d_3 n_{12} n_{123}.$$

The quantity  $\eta$  defined in (7.8), after some simplification, takes on the value

$$\begin{aligned} \eta = & 2(a_3 b_2 b_3 + a_3 b_1 b_3 - 2b_3 c_3 d_3 + 2c_1 c_2 d_3 - a_3 c_1^2 - a_3 c_2^2) n_{12} n_{123} \\ & + 4(b_2 b_3 - c_1^2) n_1 n_{123} + 2a_3 b_3 n_1 n_{12} + b_3 (a_3^2 - d_3^2) n_{12}^2 \\ & + 3(b_1 b_2 b_3 + 2c_1 c_2 c_3 - b_1 c_1^2 - b_2 c_2^2 - b_3 c_3^2) n_{123}^2. \end{aligned}$$

Arguing as before, one arrives at

Corollary 7.3. A necessary condition for the optimality of an HM design with  $n_1, n_{12}, n_{123} > 0$ , is the simultaneous realization of the following

- (a)  $ng_1 = 2f\phi_1$ ,      (b)  $nf_3 = (a_3\phi_1 + a_3\phi_2 + 2k_3d_3)f$
- (c)  $ng_2 \geq 2f\phi_2$ ,      (d)  $ng_3 \geq 2f\phi_3$ ,
- (e)  $nf_2 \geq (a_2\phi_1 + a_2\phi_3 + 2k_2d_2)f$ ,
- (f)  $nf_1 \geq (a_1\phi_2 + a_1\phi_3 + 2k_1d_1)f$ .

Again we remark here that (a) and (b) above with the cost restriction  $1 = g_1 n_1 + f_3 n_{12} + f n_{123}$  form a set of three equations from which we find the values of  $n_1, n_{12}$  and  $n_{123}$ . These values should satisfy the inequalities (c), (d), (e) and (f).

## 8. Designs with constant Q.

Given a design  $D$ , can we find a design  $D^*$  that gives the same value for the objective function  $Q$  as  $D$  does, i.e.  $Q(D^*) = Q(D)$ , while the cost for  $D^*$  is less than that for  $D$ . One simple way of achieving this is to define  $D^*$  such that the values of the  $m$ 's and the  $\nu$ 's (see (6.2)) do not change. This is equivalent to saying that the element of  $\underline{\delta}$  satisfy the following conditions, for  $(i,j,k) \in F$ .

$$(8.1) \quad 2\delta_i + a_k \delta_{ij} + a_j \delta_{ik} + b_1 \delta_{123} = 0, \quad d_i \delta_{jk} + c_i \delta_{123} = 0, \\ 2f \delta_{123} + \Sigma^*(g_i \delta_i + f_i \delta_{jk}) < 0.$$

Obviously, if such  $\underline{\delta}$  exists and the design  $D(\underline{n} + \underline{\delta})$  has cost 1, then  $D(\underline{n})$  is inadmissible.

From (8.1) we can solve, in terms of  $\delta_{123}$ , for the rest of the unknowns and obtain

$$(8.2) \quad \delta_i = (2d_j d_k)^{-1} (a_j c_j d_k + a_k c_k d_j - b_i d_j d_k) \delta_{123} \\ = \Delta^{-1} [1 + \rho_i^2 - (\rho_i \rho_j / \rho_k) - (\rho_i \rho_k / \rho_j)] \delta_{123} \\ \delta_{ij} = - (c_k / d_k) \delta_{123} = [(\rho_1 \rho_2 \rho_3 - \rho_k^2) / (1 - \rho_k^2)] \delta_{123}.$$

Substituting the above values in the inequality (8.1) and multiplying both sides by  $2d_1 d_2 d_3 < 0$ , we obtain

$$(8.3) \quad \{\Sigma^*[g_i d_i (a_k c_k d_j + a_j c_j d_k - b_i d_i d_k)(1/2) - f_i c_i d_j d_k] + 2f d_1 d_2 d_3\} \delta_{123} > 0.$$

Using (6.1), the last inequality is seen to be equivalent to

$$(8.4) \quad [-(\rho_1 \rho_2 \rho_3 / \Delta)(1/\rho_1^2 + 1/\rho_2^2 + 1/\rho_3^2) + (1/2\Delta)(3 + \rho_1^2 + \rho_2^2 + \rho_3^2) - 1/2] \delta_{123} \psi_0 > 0.$$

By observing that the case  $\rho_1 \rho_2 \rho_3 < 0$ , gives rise to a positive value for the term in brackets in (8.6), and makes  $(\delta_1, \delta_2, \delta_3)$  of the same sign as  $\delta_{123}$ , and  $\delta_{12}, \delta_{13}, \delta_{23}$  of a sign opposite to that of  $\delta_{123}$ , and using a small negative value of  $\delta_{123}$ , we are led to

Theorem 8.1. A design  $D(\underline{n})$  in which  $n_1, n_2, n_3$  and  $n_{123}$  are positive, is inadmissible if  $\rho_1 \rho_2 \rho_3 < 0$ .

In the following we shall assume that  $\rho_1 = \rho_2 = \rho_3 = \rho$ , say. For this case, we get

$$(8.6) \quad \alpha_i \equiv \alpha = (2 - \rho^2), \beta_i \equiv \beta = 1 + (1 - \rho^2)/\Delta, \\ c_i \equiv c = (\rho^3 - \rho^2)/\Delta, d_i \equiv d = (-\rho^2)/(1 - \rho^2), (i = 1, 2, 3).$$

Theorem 8.2. If  $\psi_1 \leq \psi_2$  and  $\rho_1 = \rho_2 = \rho_3$ , then we must have either  $n_1 \geq n_2$ , or  $n_{13} \geq n_{23}$ , or both.

Proof: Suppose the theorem is not true, and let  $D(\underline{n})$  be a design in which  $n_1 \leq n_2$  and  $n_{13} \leq n_{23}$ . Construct the design  $D^*(\underline{n}^*)$  where  $\underline{n}^* = (n_2, n_1, n_3, n_{12}, n_{13}, n_{23}, n_{123})$ . It follows the  $\psi(D) - \psi(D^*) = (\psi_2 - \psi_1)(n_2 - n_1) \geq 0$ , which means that  $D^*$  costs less than, or as much as  $D$ . Now we shall compare

$Q(D)$  with  $Q(D^*)$ . Let  $n_2 - n_1 = \theta \geq 0$  and  $n_{23} - n_{13} = \theta \geq 0$ . We find that  $m^* = m_1 + 2\theta$ ,  $m_2^* = m_2 - 2\theta$ ,  $\mu_1^* = \mu_1$ ,  $\mu_2^* = \mu_2$  and  $\mu_3^* = \mu_3$ . It can easily be verified that

$$Q(D^*) - Q(D) = 2\theta\theta' \{a[2n_3 + a(n_{13} + n_{23}) + bn_{123}] - d[d(n_{13} + n_{23}) + 2cn_{123}]\}.$$

Thus  $Q(D^*) - Q(D)$  is  $\geq 0$  if and only if  $2an_3 + a^2(n_{13} + n_{23}) + abn_{123} \geq d^2(n_{13} + n_{23}) + 2dcn_{123}$ . From (8.6) we see that  $a \geq 1 + |d|$  and  $b \geq 1 + |c|$ , which implies that the preceding inequality always holds, which in turn implies that  $Q(D^*) \geq Q(D)$ . This completes the proof.

#### 9. The case of equal costs and correlation coefficients.

In this section we study the case where for all  $i$ , we have  $\psi_i = \psi$  and  $\rho_i = \rho$ . We first state a result for later use.

Lemma 9.1. Consider a space  $S$  of dimension  $p(p+1)/2$ , whose points are non-negative definite symmetric matrices of size  $(p \times p)$ . Let  $B \in S$  and let  $f(B) = |B|^{\frac{1}{p}}$ . Then  $f$  is a concave function on  $S$ .

Proof: See, for example, Minc and Marcus (1964, p. 115).

Given  $B \in S$ , and a permutation  $\alpha$  of the elements  $\{1, 2, \dots, p\}$ , let  $\alpha(B)$  be a matrix obtained by permuting rows and columns of  $B$  (the same permutation for rows as for columns). We have  $|\alpha(B)| = |B|$ . Let  $B^* = \frac{1}{p!} \sum_{\alpha} \alpha(B)$ .

Lemma 9.2. We have  $|B^*| \geq |B|$ .

Proof: By Lemma 9.1, and the definition of concave function, we get

$$|B^*|^{\frac{1}{p}} = \left| \frac{1}{p!} \sum_{\alpha} \alpha(B) \right|^{\frac{1}{p}} \geq \frac{1}{p!} \sum_{\alpha} |\alpha(B)|^{\frac{1}{p}} = \frac{1}{p!} \cdot p! |B|^{\frac{1}{p}}, \text{ or}$$

$$|B^*| \geq |B|.$$



Now, for any design  $D(n_1, n_2, n_3, n_{12}, n_{13}, n_{23}, n_{123})$ , construct  $D^*(v_1, v_1, v_1, v_2, v_2, v_2, n_{123})$ , where  $v_1 = (n_1 + n_2 + n_3)/3$ ,  $v_2 = (n_{12} + n_{13} + n_{23})/3$ . Because of equal costs we have  $\psi(D^*) = 3(\psi_0 + \psi)v_1 + 3(\psi_0 + 2\psi)v_2 + (\psi_0 + 3\psi)n_{123} = (\psi_0 + \psi)(n_1 + n_2 + n_3) + (\psi_0 + 2\psi)(n_{12} + n_{13} + n_{23}) + (\psi_0 + 3\psi)n_{123} = \psi(D)$ . And because of equal correlation coefficients we can easily find that  $m_1^* = m_2^* = m_3^* = (m_1 + m_2 + m_3)/3$ , and  $\mu_1^* = \mu_2^* = \mu_3^* = (\mu_1 + \mu_2 + \mu_3)/3$ . Given any design  $D$ , let  $M$  be the  $(3 \times 3)$  matrix  $((m_{ij}))$ , with  $m_{ii} = m_i$ ,  $m_{12} = \mu_3$ ,  $m_{13} = \mu_2$ , and  $m_{23} = \mu_1$ . It is obvious that  $Q(D) = |M|$ . It can also be easily checked that  $M^* = \frac{1}{3!} \sum_{\alpha=1}^6 \alpha(M)$ . From Lemma 9.1, it follows that  $|M^*| \geq |M|$ , or  $Q(D^*) \geq Q(D)$ . We have established

Theorem 9.1. Consider the case of equal costs and correlations. Given any design  $D(n_1, n_2, n_3, n_{12}, n_{13}, n_{23}, n_{123})$ , the design  $D^*(v_1, v_1, v_1, v_2, v_2, v_2, n_{123})$  is at least as good as  $D$ , where  $v_1 = (n_1 + n_2 + n_3)/3$ , and  $v_2 = (n_{12} + n_{13} + n_{23})/3$ .

Remark: The extension of this result to general  $p$  is immediate.

Theorem 9.2: In the case of equal correlations, a design in which  $n_1, n_2, n_3, n_{123} > 0$ , is inadmissible.

Proof: We shall follow the approach of keeping  $Q$  fixed and reducing the cost described in section 8. From (8.4) we find that the coefficient of  $\psi_0$  is  $(1 - \rho)/(1 + 2\rho)$ . The fact  $\Delta > 0$  implies that  $\rho > -1/2$ , which in turn implies that the coefficient of  $\psi_0$  is always positive. Thus we can take  $\delta_{123} < 0$ .

Formulas (8.5) also become

$$\delta_1 = \delta_2 = \delta_3 = (1/1 + 2\rho)\delta_{123}, \delta_{12} = \delta_{13} = \delta_{23} = -(1 + \rho/1 + 2\rho)\delta_{123}.$$

This shows that  $\delta_1, \delta_2$  and  $\delta_3$  are of the same sign as  $\delta_{123}$ , while  $\delta_{12}, \delta_{13}$  and  $\delta_{23}$  have a sign opposite to that of  $\delta_{123}$ . The proof is completed by continuing as in theorem 8.1.

Corollary 9.1. In the case of equal costs and equal correlations, a design in which both  $v_1$  and  $v_3$  are positive is inadmissible, where  $v_1 = n_1 = n_2 = n_3$ , and  $n_{123} = v_3$ .

Proof: Use theorems 9.1 and 9.2.

Lemma 9.3: In the case  $\psi_i = \psi, \rho_i = \rho (i = 1, 2, 3)$ , the condition  $v_1 = 0$  implies that the optimal design must have  $v_2 = 0$ , and the SM model is optimal.

Proof: Let  $n_{123} = v_3$ . Our object is to maximize  $Q = m^3 + 2\mu^3 - 3m\mu^2 = (m - \mu)^2 (m + 2\mu)$ , subject to  $1 = 3(\psi_0 + 2\psi)v_2 + (\psi_0 + 3\psi)v_3 = x_1 m + x_2 \mu$ , say where  $m = 2av_2 + bv_3$  and  $\mu = dv_2 + cv_3$ . Solving for  $(v_2, v_3)$  we find

$$\begin{bmatrix} v_2 \\ v_3 \end{bmatrix} = \begin{bmatrix} 1 \\ 2ac - bd \end{bmatrix} \begin{bmatrix} c & -b \\ -d & 2a \end{bmatrix} \begin{bmatrix} m \\ \mu \end{bmatrix}.$$

Hence

$$x_1 = [(3c - d)\psi_0 + (6c - 3d)\psi]/(2ac - bd),$$

$$x_2 = [(2a - 3b)\psi_0 + 6(a - b)\psi]/(2ac - bd).$$

Now, we have

$$3c - d = -\rho^2(2 + \rho)/(1 - \rho^2)(1 + 2\rho),$$

$$2c - d = -\rho^2/(1 + 2\rho)(1 - \rho^2),$$

$$2a - 3b = 2[(1 + \rho)^2 - \rho^3]/(1 - \rho^2)(1 + 2\rho),$$

$$a - b = -\rho^2/(1 - \rho^2)(1 + 2\rho),$$

$$2ac - bd = -2\rho^2/(1 - \rho^2)(1 + 2\rho).$$

Hence

$$x_1 = (1/2)(2 + \rho)\psi_0 + (3/2), x_2 = [(1 + \rho)/\rho]^2 \psi_0 + 3.$$

Now  $u = (1 - x_1^m)/x_2$ , and hence  $Q(m) = (1/x_2)^3[(x_2 + x_1)m - 1]^2[(x_2 - 2x_1)m + 2]$ . This is a cubic polynomial in  $m$ , with coefficient of  $m^3$  having the same sign as  $(x_2 - 2x_1)$  ( $x_2, x_1$  being non-negative). But  $x_2 - 2x_1 = [(1 - \rho^2)(1 + 2\rho)/\rho^2]\psi_0 \geq 0$ . The equation  $Q(m) = 0$ , has a double root  $m_0$  given by  $m_0 = [1(x_1 + x_2)] \geq 0$  ( $x_1, x_2 \geq 0$ ). Also, it has a single root  $m^+ = [2/(2x_1 - x_2)] \leq 0$ .

In the plane  $(v_2, v_3)$ , the cost constraint restricts the set in which we want to maximize  $Q$ , to the line segment between the two points,

$[1/(3\psi_0 + 6\psi), 0]$  and  $[0, 1/(\psi_0 + 3\psi)]$ . This line segment is transformed to a line segment whose projection on the  $m$ -axis is the interval  $(m', m'')$  where  $m' = a/(3/2\psi_0 + 3\psi)$ ,  $m'' = b/(\psi_0 + 3\psi)$ .

Now  $a \leq b$ , which implies that  $m' \leq m''$ . At this stage, we would like to show that  $m'$  is larger than the value of the double root  $m_0$ . Now  $m_0 = 1/[(1/2)(2 + \rho)\psi_0 + ((1 + \rho)/\rho)^2 \psi_0 - \rho\psi_0 + a/2\psi]$ . Since  $a > 1$ , our objective will be accomplished if we show that  $(1/2)(2 + \rho) + ((1 + \rho)/\rho)^2 - \rho - 3/2 \geq 0$ , or  $(1 + \rho)^2/\rho^2 - (1 + \rho)/2 = (1 + \rho)(2 + 2\rho - \rho^2)/(2\rho^2) = [(1 + \rho)(1 + 2\rho + 1 - \rho^2)/(2\rho^2)] \geq 0$ . This however, is always true. Thus  $Q$ , plotted as a function of  $m$ , is tangent to the  $m$  axis at  $m_0$ , and is a monotone increasing function of  $m$  for  $m \geq m_0$ . We conclude that  $Q$  achieves its

restricted maximum at the point  $m'' = b/(\psi_0 + 3\psi)$ , for which  $\mu'' = c/(\psi_0 + 3\psi)$ . The inverse image of the point  $(m'', \mu'')$  in the  $(v_2, v_3)$  plane is the point  $[0, 1/(\psi_0 + 3\psi)]$ . Thus the SM design is the optimal one as the lemma states.

Lemma 9.4: In the case of equal costs and correlations, a design in which  $v_3 = 0$ , cannot be optimal.

Proof: Assume that  $D(v_1, v_1, v_1, v_2, v_2, v_2, v_3)$  is an optimal design in which  $v_3 = 0$ . We will proceed to determine the exact values of  $v_1$  and  $v_2$ . We shall also adhere to the same scheme and notation as in the proof of

Lemma 9.3. In the present case, we want to maximize  $Q = (m - \mu)^2(m + 2\mu)$ , subject to  $1 = 3(\psi_0 + \psi)v_1 + 3(\psi_0 + 2\psi)v_2 = x_1m + x_2\mu$ , where  $m = 2v_1 + 2av_2$ ,  $\mu = dv_2$ . We find that  $x_1 = (3/2)(\psi_0 + \psi) \geq 0$ , and that  $x_2 = 3(1 - a)\psi_0/d + 3(2 - a)\psi/d = 3\psi_0/\rho^2 + 3\psi \geq 0$ . The coefficient of the cubic term in  $Q(m)$  has the same sign as  $x_2 - 2x_1$  which is equal to  $(3/\rho^2)\psi_0 - 3\psi \geq 0$ . The equation  $Q(m) = 0$  has a double root  $m_0 = [1/(x_1 + x_2)] \geq 0$ , and a single root  $m^+ = [2/(2x_1 - x_2)] \leq 0$ . The line segment in the  $(v_1, v_2)$  plane dictated by the cost restriction is transformed into a line segment whose projection on the  $m$ -axis in the  $(m, \mu)$  plane is the interval  $(m', m'')$ , where  $m' = [2/(3\psi_0 + 3\psi)]$  and  $m'' = [2a/(3\psi_0 + 6\psi)]$ . The fact  $a - 2 = [(2 - \rho^2)/(1 - \rho^2)] - 2 = \rho^2/(1 - \rho^2) \geq 0$ , implies that  $m' \leq m''$ . The double root  $m_0 = [1/(x_1 + x_2)] = 1/[3\psi_0(1/2 + 1/\rho^2) + (9/2)\psi] \leq 1/[\psi_0(3/2) + (3/2)\psi] = m'$ . All this leads to the conclusion that  $Q(m)$  achieves its restricted maximum at  $m'' = [2a/(3\psi_0 + 6\psi)]$ , whose inverse image in the  $(v_1, v_2)$  plane is the point  $v_1 = 0$  and  $v_2 = 1/(3\psi_0 + 6\psi)$ . Thus the design  $D$  which was assumed to be optimal and

had  $v_3 = 0$ , must also have  $v_1 = 0$  and  $v_2 = 1/(3\psi_0 + 6\psi) > 0$ . But in Lemma 9.3 we saw that if  $v_1 = 0$  then the optimal design must have  $v_2 = 0$ . This leads to a contradiction and the proof is complete.

Theorem 9.3: In the case of equal costs and equal correlations, the SM design is optimal.

Proof: This follows by using successively **theorem 9.1**, corollary 9.1, and lemmas 9.9 and 9.3.

## REFERENCES

1. Hocking, R. R. and W. B. Smith. (1971) Optimal incomplete multinormal samples. To appear in Technometrics.
2. Kleinbaum, D. G. (1970). Estimation and hypothesis testing for generalized multivariate linear models. Unpublished thesis, University of North Carolina, Chapel Hill, N.C.
3. Marcus, M. and H. Minc. (1964). A survey of matrix theory and matrix inequalities. Allyn and Bacon, Boston.
4. Rao, C. R. (1965). Linear statistical inference and its applications. Wiley and Sons, New York.
5. Srivastava, J. N. and L. L. McDonald. (1969). On the cost wise optimality of hierarchical multiresponse randomized block designs under the trace criterion. Ann. Inst. Stat. Math. 21, 507-514.
6. Srivastava, J. N. and L. L. McDonald. (1971). On the cost wise optimality of certain hierarchical and standard multiresponse models under the determinanat criterion. J. Multivariate Analysis, Volume 1.
7. Trawinsky, I. M. (1961). Incomplete variable designs. Unpublished thesis Virginia Polytechnic Institute, Blacksburg, Virginia.
8. Roy, S.N., Gnanadesikan, R., and Srivastava, J. N. (1971). Analysis and Design of Certain Quantitative Multiresponse Experiments. Pergamon Press.